

**SMT Series - Aluminum Wound, Open Style Design**

The SMT series is economical and compact with traditional open wound varnished coils. Ratings are from 1 KVA through 5 KVA with Class 180°C insulation system and **115°C rise** under full load. SMT transformers provide excellent cost benefits with NEMA regulation characteristics and electrical performance specifications.

**Features**


- Available from 1000–5000 VA, 60 Hz unless noted
- Meets or exceeds electrical requirements of NEMA, ANSI, NMTBA and JIC

**Related Products**

- Linear Power Supplies
- DIN Rail DC Power Supplies
- Constant Voltage Transformers
- Line Reactors




**SMT Design Style**

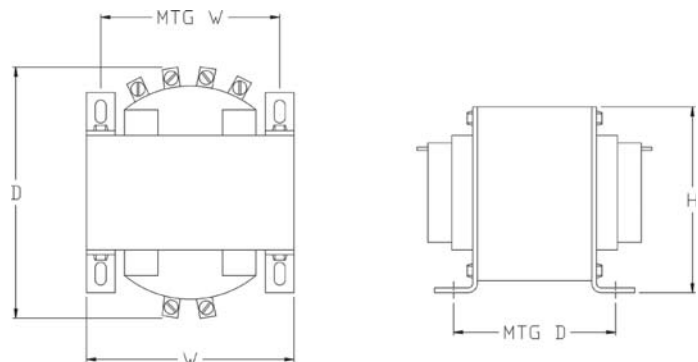

**Selection Table**

**Group 1 – 240 X 480 Volt Primary, 120 Volt Secondary 60 Hz**  
**230 X 460 Volt Primary, 115 Volt Secondary 50/60 Hz**  
**220 X 440 Volt Primary, 110 Volt Secondary 50/60 Hz**

| VA   | Catalog Number | Height (inch) | Width (inch) | Depth (inch) | Mtg Width | Mtg Depth | Slot Size (inches) | Approx. Ship Weight lbs (kg) |
|------|----------------|---------------|--------------|--------------|-----------|-----------|--------------------|------------------------------|
| 1000 | <b>T1000</b>   | 5.63          | 6.38         | 6.38         | 5.31      | 4.25      | .31 x .69          | 22 (10.00)                   |
| 1500 | <b>T1500</b>   | 6.25          | 6.75         | 8.25         | 5.75      | 5.63      | .44 x .69          | 28.3 (12.86)                 |
| 2000 | <b>T2000</b>   | 6.25          | 6.75         | 9.13         | 5.75      | 6.63      | .44 x .69          | 38.5 (17.5)                  |
| 3000 | <b>T3000</b>   | 8             | 9            | 9.3          | 8         | 5.81      | .44 x .69          | 55 (25.00)                   |
| 5000 | <b>T5000</b>   | 8             | 9            | 11.3         | 8         | 7.5       | .44 x .69          | 91 (41.36)                   |

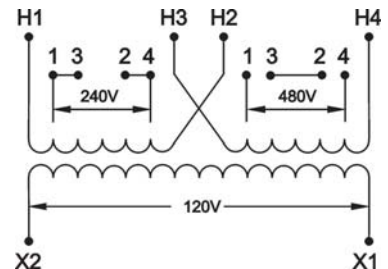

**Note:** Fuse holders are not available for this voltage configuration.